

Freight Hoists



Quality Vertical Transport for Goods and Passengers
Australia's Most Reliable Freight Hoist & Goods Lift

Overview



Major Supermarket - Victoria

The Australian designed & manufactured vertical transport solution

Safetech designs have transformed the form, function and features of Goods Lifts and Freight Hoists.

Intuitive, easy to use flexible control systems, a 40mm low profile design that eliminates or significantly reduces the need for pit mounting and smooth, quiet travel are just some of Safetech's innovations. Robust, simple to use they eliminate the safety and logistical problems associated with the vertical movement of large and heavy loads within factories and warehouses.

We have designs for goods only, goods and passenger configurations as well as disabled access features making vertical travel easy.

Highlights

- ❖ Travel up to 14,000mm
- ❖ 12 m/min (200 mm/s) Travel Speed
- ❖ Up to 4 levels
- ❖ Capacity to 10 tonnes
- ❖ Freestanding or fitted into an existing shaft
- ❖ Comply with Australian Design Standards
- ❖ Available with multiple door configurations
- ❖ Goods only, Personnel plus goods (attended)
- ❖ Personnel DDA compliant options



Self Storage facility - Storage King - Marsden Park

Applications & Features

A Freight Hoist for every type of facility


The pitless design, with customisable floor to floor heights, can easily integrate into almost any space. It is suitable for moving goods only in retail, warehousing, apartments, hospitality and other harsh workshop environments.



DuraFast Rapid Roller Door - A game changer in the industry


After the control panels, the door is your first interaction with the hoist, so it must impress. The Safetech designed DuraFast roller door is one of the latest models in our product line that has halved the industry standard in opening and closing times. Our product also far exceeds our competitors durability by offering proven 100% duty cycles and unprecedented cycle counts. Internally mounted drive motor that lowers the mounting profile and maximises door opening height.

- 100% duty cycles
- Increased durability
- 50,000 plus cycles
- 2x normal roller door speed
- Compact design, internal drive
- Affordable

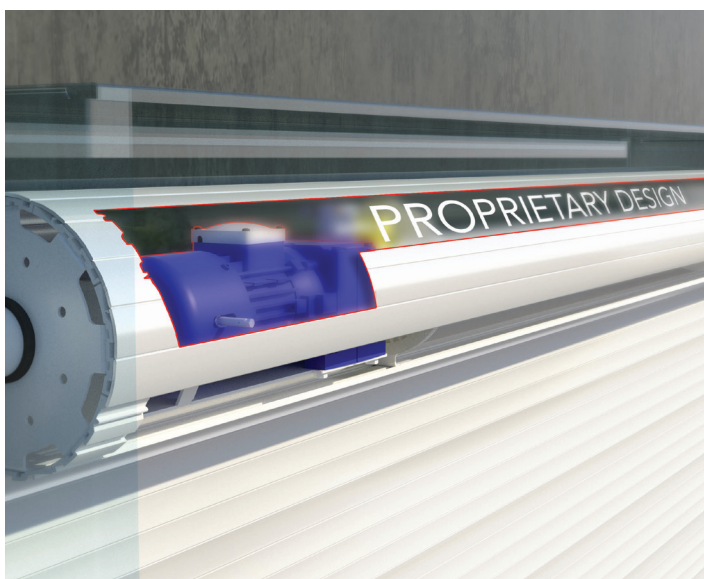

Finishes


Booth Finishes

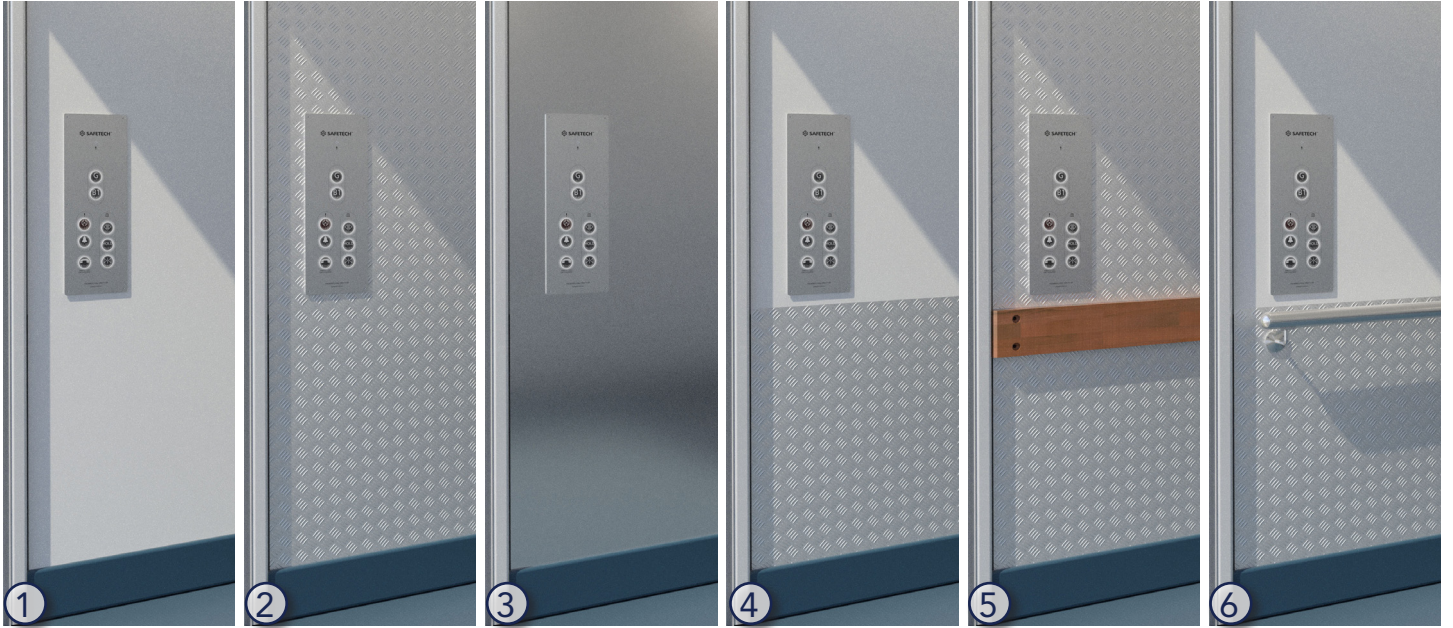

- 1) Timber Plaspoly Surf Mist finish comes standard
- 2) Aluminium Chequer plate full height
- 3) Polished Stainless Steel panelling

- 4) Aluminium Chequer plate lower section
- 5) Timber Bump rails, 1000mm height
- 6) DDA compliant Stainless Steel Handrail

Flooring Options

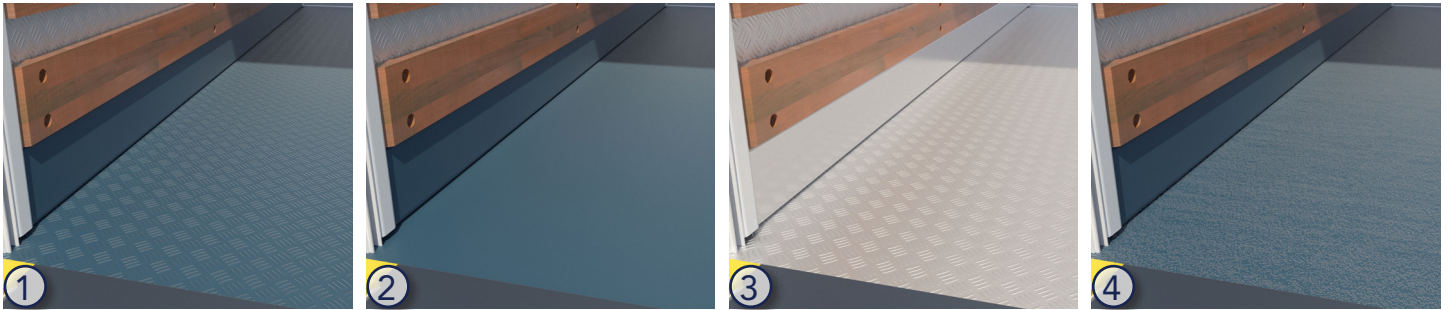

- 1) Steel Chequer plate
- 2) Smooth Plate

- 3) Stainless Steel Chequer plate
- 4) Non-Slip Sand Grit Enamel

Ceilings





Mesh Ceiling



White Aluminium panel

Construction & Footprint

Free-standing and Shaft mounted options

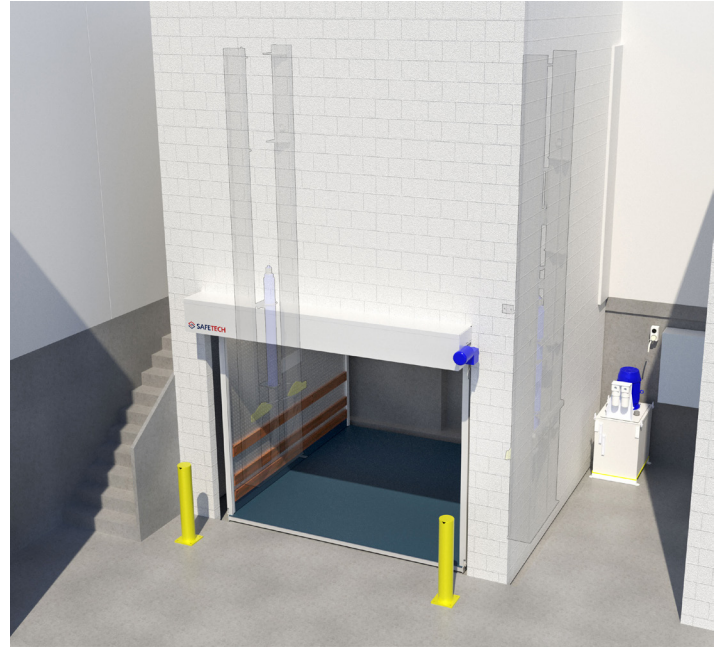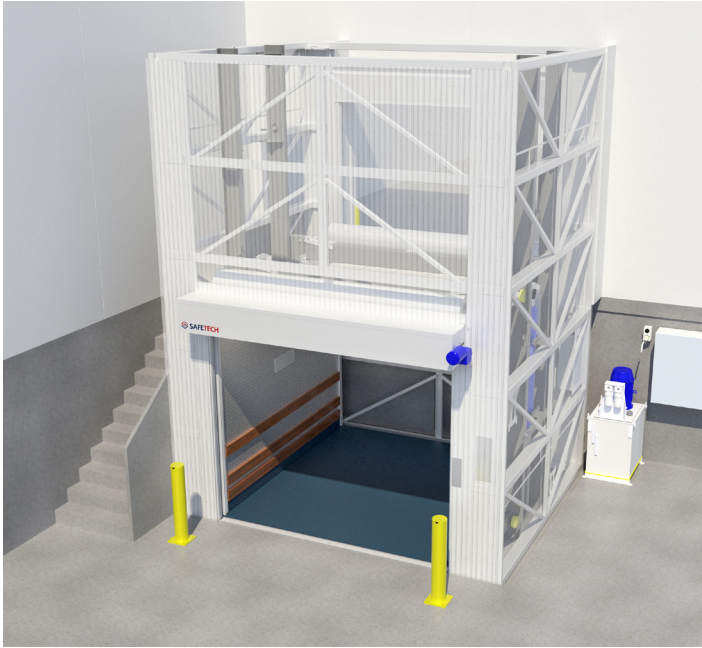

Free-standing Freight Hoist

Our free-standing freight hoist options are popular in larger retail warehouses and self storage facilities that want to avoid constructing an expensive shaft.

Depending on the site, installation can be simple with drop in options available. Our specially made frames are made to fit, so they prevent installation issues that can arise from changes and variable tolerances in shaft construction.

Cladding options become available to boost the aesthetic appeal of the surrounding site.

Shaft Mounted Hoist

Integrating our Freight Hoists into a designed shaft can create a seamless look to your space. It allows for rendering of the outside walls, stronger acoustic dampening and a more disguised footprint.

Shaft mounting is common in buildings that try to use the walls as load bearing elements. In this case it is crucial that Safetech are involved in the design discussions to ensure a perfect fit and a streamlined installation.

Slim Hoist Designs.

Integrated Slim freight hoists boast all the features of its larger counterparts, including the ability to be attended, but with the compact footprint of our other compact freight hoist, Freight Mate.

Specifications*

TRAVEL SPEED	12 m/min (200 mm/s)
PLATFORM SIZE (WxL)	900 mm x 2100mm
INTERNAL SHAFT (WxL)	1560 mm x 2240mm
CAPACITY	500 kgs
DOOR OPENING	1600 mm
MAXIMUM VERTICAL TRAVEL	5 meters

**Other sizes available*



Controls

A professional and modern look

When your hoist is customer facing, you want to ensure that the hoist matches the presentation quality of the rest of your facility. Our hoists feature modern and attractive personell lift style controls as standard that far exceed that of the competition.



Safetech Customer Care

When you use Safetech Customer Care you get a network of trained service technicians backed by the engineering team that designed and manufactured your equipment.

You will speak to our friendly Melbourne based service coordinators who also have extensive product knowledge.

No other company comes close to offering such comprehensive support for Safetech products. Our focus is our equipment. So you can be sure we will always know how to look after you.



Freight Mate

What is a Safetech Freight Mate?


Safetech Freight Mate is the compact, modular solution to goods movement in any building that requires transfer of product between floors.

With 1,500 kg capacity and up to 4,800 mm of travel, Freight Mate provides users with a safe and ergonomic lifting solution. It can eliminate the need for forklifts to load mezzanines and creates a much safer, worker friendly environment.

Freight Mate's unique pitless design means you can buy and install without any need to prepare or cut a concrete pit. No on-site welding or building anchoring is required. This makes it much easier to fit into existing buildings with difficult access.

Highlights


- ❖ Custom floor to floor heights
- ❖ Roll On – Roll Off with ease
- ❖ Lower price alternative to traditional freight hoists
- ❖ Free Standing and self supporting

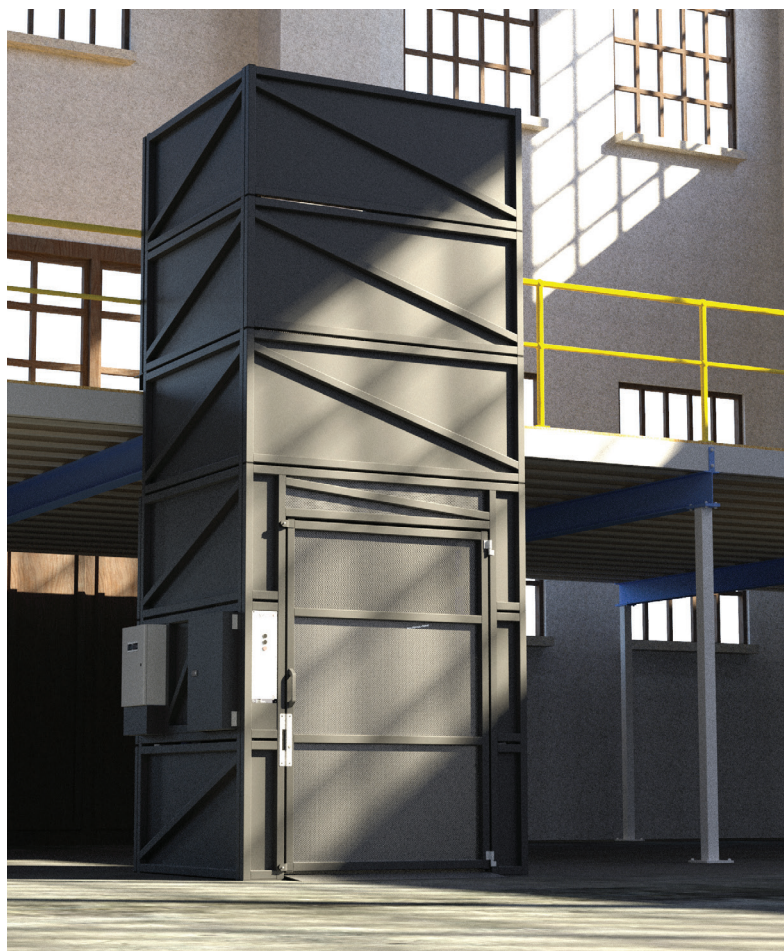


Size Options

Each model of Freight Mate is capable of servicing any floor-to-floor distance within its specified range, without the need for special parts to be manufactured. Setup only requires Safetech to adjust the height of the upper landing gate on site.

*Transparency is for reference only.

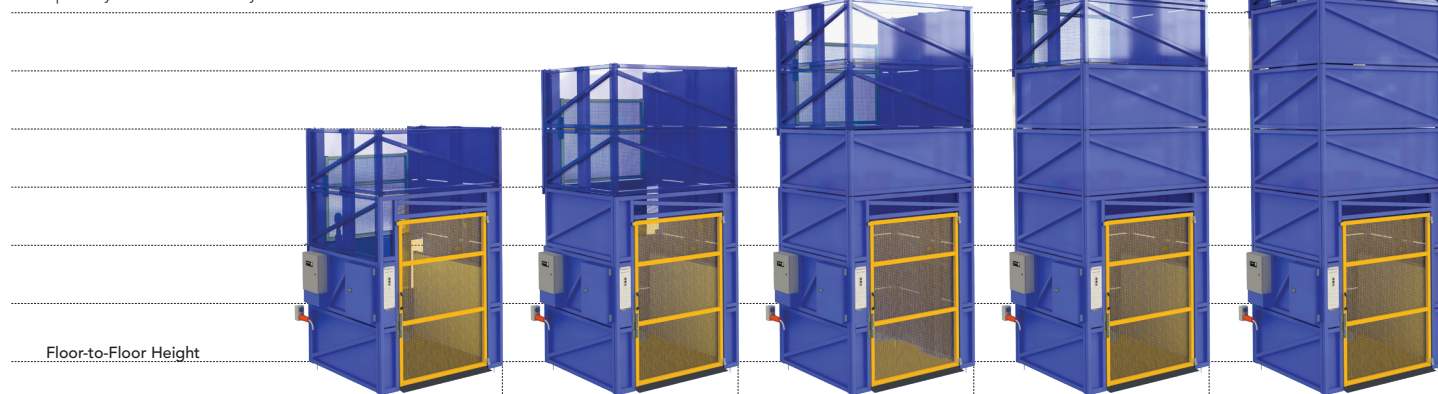

	FM 1600	FM 2400	FM 3200	FM 4000	FM 4800
TRAVEL	Up to 1600	1600 - 2400	2400 - 3200	3200 - 4000	4000 - 4800
CAPACITY (KG)	1500	1500	1500	1500	1000
UNIT WEIGHT (KG)	1800	1900	2000	2100	2200
OVERALL HEIGHT	3200	4000	4800	5600	6400

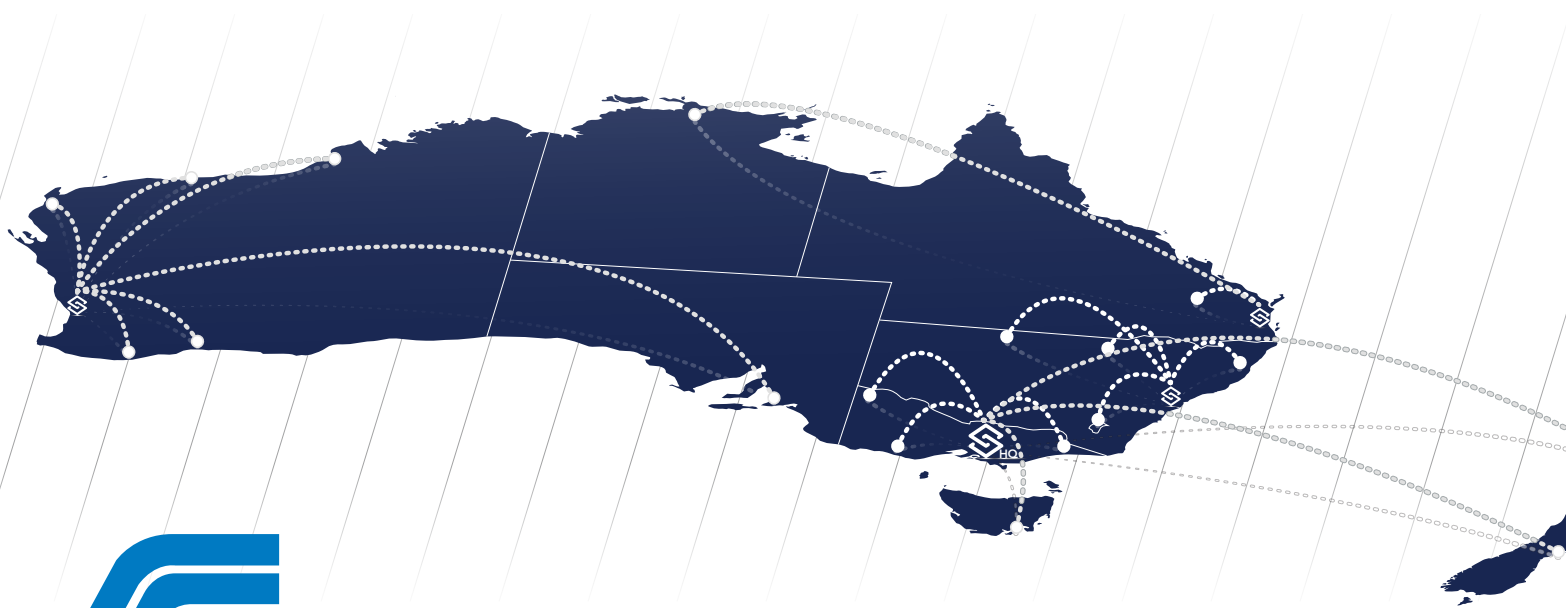

**SELF STORAGE
ASSOCIATION OF
AUSTRALASIA**

Safetech are proud members of the SSAA providing hoists across the industry.



39-45 Della Torre Road, Moe Victoria 3825
t: 1800 674 566
e: sales@safetech.com.au

8 | safetech.com.au



Servicing customers across Australia and New Zealand